

PRODUCT DESCRIPTION

Fastener with increased load capacity, used for hanging fixtures on a threaded, steel rod Fi 3 mm. In addition, it can be used as a connection for one pole of electricity. Mounted in the guide (small lock) of the selected profile. The power cable can be inserted through the hole drilled in the extrusion and further through the channel in the fastener

Fill empty fields

Product nr.

Fixture type

Company


Job name

Date




TECHNICAL SPECIFICATION


TECHNICAL DRAWING

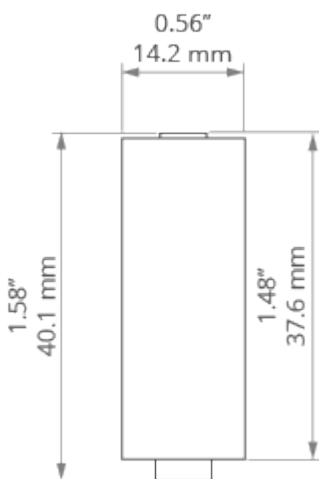


RELATED PROFILES



GIZA-LL profile
Ref: C0758




OPK-4 Profile
Ref: C0370



3035 Profile
Ref: 18039




JAZ Profile
Ref: B8547




OLEK Profile
Ref: B8505




PDS-ZM Profile
Ref: B7696




GIZA Profile
Ref: B5556




LIPOD Profile
Ref: B5554




SEPOD Profile
Ref: B6593




3035-O Profile
Ref: B8441




PDS-ZMG Profile
Ref: C1418




4050 Profile
Ref: 18050



4050-W Profile
Ref: 18051



GIZA-DUO-LL
Profile
Ref: C2162



LIPOD-50 Profile
Ref: C2609

RELATED PRODUCTS

ACCESSORIES



100 PUSZ brass
chrome Rod 1 m
Ref: 42518

MARKETING MATERIALS



Display
P230-90109M
Ref: 90109M