

PRODUCT DESCRIPTION

Fastener with increased load capacity, used for hanging fixtures on a steel cable. In addition, it can be used as a connection for one pole of electricity as the [steel cable with Cu core](#) can be conductive. Attached to the extrusion with a screw through a drilled and milled hole. The screw has a flat head, thanks to which it is flush with the internal surface of the extrusion after mounting. The power cable can be inserted into the fastener through the hole in the screw head.

Fill empty fields

Product nr.

Fixture type

Company


Job name

Date




TECHNICAL SPECIFICATION


TECHNICAL DRAWING

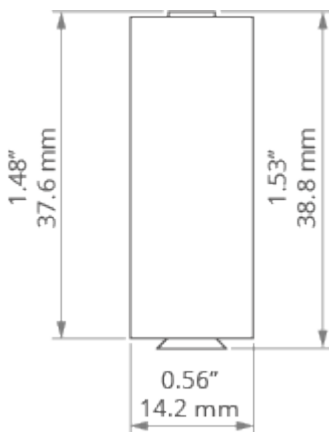


RELATED PROFILES



GIZA-LL profile
Ref: C0758



OPK-4 Profile
Ref: C0370




3035 Profile
Ref: 18039




JAZ Profile
Ref: B8547




OLEK Profile
Ref: B8505




SILER Profile
Ref: B9325



MICRO-ALU Profile
Ref: B1888



TAMI Profile
Ref: B5390




PDS-4-ALU Profile
Ref: B1718



PDS-ZM Profile
Ref: B7696



REGULOR Profile
Ref: B468+43




TEST-36 Profile
Ref: B6639




TEST-74 Profile
Ref: W4507




TETRA-43 Profile
Ref: W4476




TETRA-78 Profile
Ref: W4508




GIZA Profile
Ref: B5556




SEPOD Profile
Ref: B6593




TESPO Profile
Ref: 18020




3035-O Profile
Ref: B8441




PDS-4-PLUS
Profile
Ref: C1263




PDS-ZMG Profile
Ref: C1418




MICRO-HG Profile
Ref: C1419




TAPO Profile
Ref: C1919




PDS-ZM-PLUS
Profile
Ref: C2056




4050 Profile
Ref: 18050



4050-W Profile
Ref: 18051



GLAZA-LL Profile
Ref: C2627



MICRO-PLUS
Profile
Ref: C2966