

**PRODUCT DESCRIPTION**

Fastener with increased load capacity, used for hanging fixtures on a threaded, steel FI-3 ROD. In addition, it can be used as a connection for one pole of electricity. Attached to the extrusion with a screw through a drilled and milled hole. The screw has a flat head, thanks to which it is flush with the internal surface of the extrusion after mounting. The power cable can be inserted into the fastener through the hole in the screw head.

Fill empty fields


Product nr.

Fixture type


Company

Job name


Date

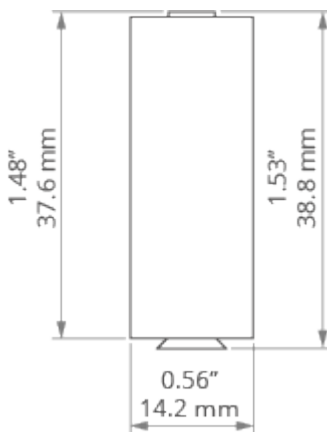**TECHNICAL SPECIFICATION****TECHNICAL DRAWING**


**RELATED PROFILES**




GIZA-LL profile  
Ref: C0758




SILER Profile  
Ref: B9325



MICRO-ALU Profile  
Ref: B1888




TAMI Profile  
Ref: B5390



PDS-4-ALU Profile  
Ref: B1718




REGULOR Profile  
Ref: B468+43




TEST-36 Profile  
Ref: B6639




TEST-74 Profile  
Ref: W4507



TETRA-43 Profile  
Ref: W4476




TETRA-78 Profile  
Ref: W4508




TESPO Profile  
Ref: 18020




PDS-4-PLUS  
Profile  
Ref: C1263



MICRO-HG Profile  
Ref: C1419



TAPO Profile  
Ref: C1919



GLAZA-LL Profile  
Ref: C2627