

PRODUCT DESCRIPTION

Fastener with increased load capacity, used for hanging fixtures on a threaded, steel FI-3 ROD. In addition, it can be used as a connection for one pole of electricity. Attached to the extrusion with a screw through a drilled and milled hole. The screw has a flat head, thanks to which it is flush with the internal surface of the extrusion after mounting. The power cable can be inserted into the fastener through the hole in the screw head.

Fill empty fields

Product nr.

Fixture type

Company


Job name

Date




TECHNICAL SPECIFICATION


TECHNICAL DRAWING

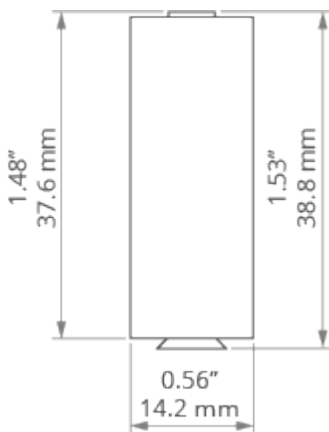


RELATED PROFILES




GIZA-LL profile
Ref: C0758




SILER Profile
Ref: B9325



MICRO-ALU Profile
Ref: B1888



TAMI Profile
Ref: B5390



PDS-4-ALU Profile
Ref: B1718




REGULOR Profile
Ref: B468+43




TEST-36 Profile
Ref: B6639




TEST-74 Profile
Ref: W4507



TETRA-43 Profile
Ref: W4476




TETRA-78 Profile
Ref: W4508




TESPO Profile
Ref: 18020




PDS-4-PLUS
Profile
Ref: C1263




MICRO-HG Profile
Ref: C1419



TAPO Profile
Ref: C1919



GLAZA-LL Profile
Ref: C2627



MICRO-PLUS
Profile
Ref: C2966