

PRODUCT DESCRIPTION

- Suitable for profiles with small sizes and smooth surface
- Suspends and powers the lighting fixture simultaneously

Fill empty fields

Product nr.

Fixture type

Company

Job name

Date



TECHNICAL SPECIFICATION

Application

- suspending and powering small-size lighting fixtures,
- mounting to profiles without external elements for mounting accessories.


Mounting

- to the profile using the MR hook built into the fastener,
- cable locked with a pressure screw.


Additional information

- suitable for conductive cables with a maximum diameter of 1.5 mm.


TECHNICAL DRAWING

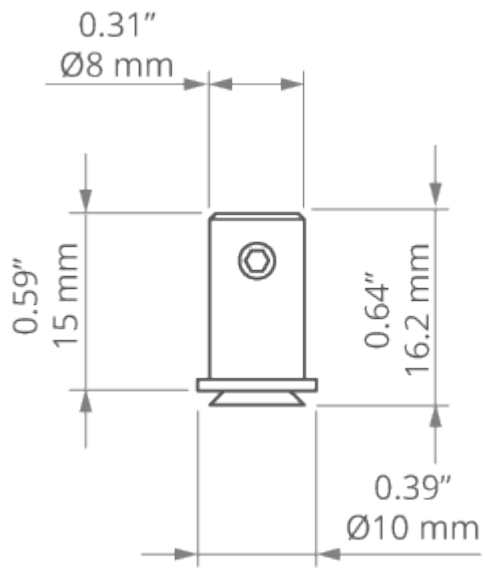


RELATED PROFILES




SILER Profile
Ref: B9325



MICRO-ALU Profile
Ref: B1888



TAMI Profile
Ref: B5390




PDS-4-ALU Profile
Ref: B1718




REGULOR Profile
Ref: B468+43




TESPO Profile
Ref: 18020




PDS-4-PLUS
Profile
Ref: C1263




MICRO-HG Profile
Ref: C1419



TAPO Profile
Ref: C1919



GLAZA-LL Profile
Ref: C2627




MICRO-PLUS
Profile
Ref: C2966

RELATED PRODUCTS

ACCESSORIES



Isolated CU cable
FI-1.35 mm
Ref: 70310



Steel wire FI-1 1m
Ref: 1397