

### PRODUCT DESCRIPTION

- ADJUSTABLE ANGLE BETWEEN PROFILES
- Possibility of building lighting fixtures with polygonal shapes
- Well stabilized profile connections

### Fill empty fields

Product nr.	
Fixture type	
Company	
Job name	
Date	



### **TECHNICAL SPECIFICATION**

### **Application**

The product is used to connect anodized profiles from the KLUŚ offer, equipped with a ZM socket at an angle of 60 degrees with a tolerance of  $\pm$ - 5 degrees. They also give the possibility of creating T-, X-, Y-shaped fixtures from profiles equipped with 3 ZM sockets.


# **Assembly**

With pressure screws.

#### **Additional information**

If the angle between the connected lighting fixtures is other than nominal, it can be bent to the desired value by 5 degrees on each side.



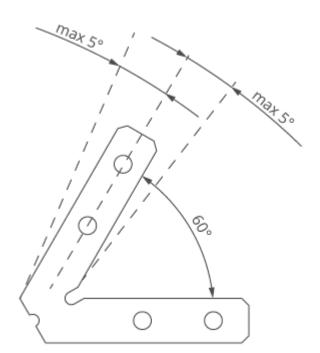



# **RELATED PROFILES**



GIZA-LL profile Ref: C0758



OPK-4 Profile Ref: C0370



3035 Profile Ref: 18039



JAZ Profile Ref: B8547



OLEK Profile Ref: B8505



KOPRO-30 Profile Ref: B7890



PDS-ZM Profile Ref: B7696



GLAD-45 Profile Ref: B7009




KUBIK-45 Profile Ref: B7697



GIZA Profile Ref: B5556



LIPOD Profile Ref: B5554



LOKOM Profile Ref: B5553



LARKO Profile Ref: B5552



OPAC-30 Profile Ref: B6164



KOPRO Profile Ref: B6367



DES Profile Ref: 18030




GLADES Profile Ref: 18036




KIDES-DUO Profile Ref: 18032



KIDES Profile Ref: 18031




SEPOD Profile Ref: B6593




SEKOMA Profile Ref: B6595



SEKODU Profile Ref: B6597



3035-O Profile Ref: B8441



LARKO-50 Profile Ref: C0756





PIKO-ZM Profile Ref: C1168



PDS-ZMG Profile Ref: C1418



RAM-KOL-50 Profile Ref: 18060



RAM-KOL-100 Profile Ref: 18062



4050 Profile Ref: 18050



4050-W Profile Ref: 18051