

PRODUCT DESCRIPTION

- ADJUSTABLE ANGLE BETWEEN PROFILES
- Possibility of building lighting fixtures with polygonal shapes
- Well stabilized profile connections

Fill empty fields

Product nr.	
Fixture type	
Company	
Job name	
Date	



TECHNICAL SPECIFICATION

Application

The product is used to connect anodized profiles from the KLUŚ offer, equipped with a ZM socket at an angle of 120 degrees with a tolerance of \pm - 5 degrees. They also give the possibility of creating T-, X-, Y-shaped fixtures from profiles equipped with 3 ZM sockets.


Assembly

With pressure screws.

Additional information


If the angle between the connected lighting fixtures is other than nominal, it can be bent to the desired value by 5 degrees on each side.



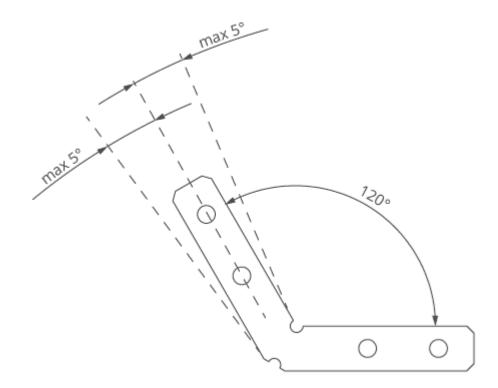



RELATED PROFILES



GIZA-LL profile Ref: C0758



OPK-4 Profile Ref: C0370




3035 Profile Ref: 18039



JAZ Profile Ref: B8547



OLEK Profile Ref: B8505



KOPRO-30 Profile Ref: B7890



PDS-ZM Profile Ref: B7696



PDS-O Profile Ref: B3777



GLAD-45 Profile Ref: B7009



KUBIK-45 Profile Ref: B7697



TAN-C5 Profile Ref: B5391



PAC-ALU Profile Ref: B4370



TRIADA Profile Ref: B4476




GIZA Profile Ref: B5556



LIPOD Profile Ref: B5554



LOKOM Profile Ref: B5553



LARKO Profile Ref: B5552



OPAC-30 Profile Ref: B6164



KOPRO Profile Ref: B6367



DES Profile Ref: 18030




GLADES Profile Ref: 18036



KIDES-DUO Profile Ref: 18032



KIDES Profile Ref: 18031



SEPOD Profile Ref: B6593






SEKOMA Profile Ref: B6595



SEKODU Profile Ref: B6597



3035-O Profile Ref: B8441



LARKO-50 Profile Ref: C0756



PIKO-ZM Profile Ref: C1168



PDS-ZMG Profile Ref: C1418




RAM-KOL-50 Profile Ref: 18060



RAM-KOL-100 Profile Ref: 18062



4050 Profile Ref: 18050



4050-W Profile Ref: 18051