

PRODUCT DESCRIPTION

- ADJUSTABLE ANGLE BETWEEN PROFILES
- Possibility of building lighting fixtures with polygonal shapes
- Well stabilized profile connections

Fill empty fields

Product nr.	
Fixture type	
Company	
Job name	
Date	



TECHNICAL SPECIFICATION

Application


The product is used to connect anodized profiles from the KLUŚ offer, equipped with a ZM socket at 135 degrees with a tolerance of +/- 5 degrees. They also give the possibility of creating T-, X-, Y-shaped fixtures from profiles equipped with 3 ZM sockets.

Assembly


With pressure screws.

Additional information


If the angle between the connected lighting fixtures is other than nominal, it can be bent to the desired value by 5 degrees on each side.

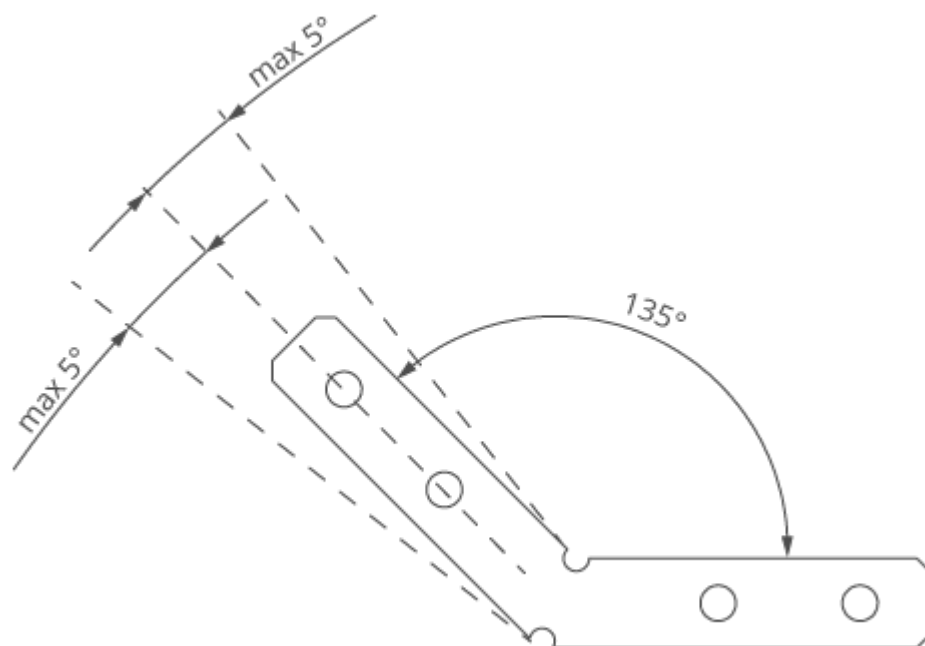


RELATED PROFILES



GIZA-LL profile
Ref: C0758




OPK-4 Profile
Ref: C0370




3035 Profile
Ref: 18039



JAZ Profile
Ref: B8547



OLEK Profile
Ref: B8505




KOPRO-30 Profile
Ref: B7890




PDS-ZM Profile
Ref: B7696




GLAD-45 Profile
Ref: B7009




KUBIK-45 Profile
Ref: B7697




GIZA Profile
Ref: B5556




LIPOD Profile
Ref: B5554




LOKOM Profile
Ref: B5553




LARKO Profile
Ref: B5552




OPAC-30 Profile
Ref: B6164




KOPRO Profile
Ref: B6367




DES Profile
Ref: 18030




GLADES Profile
Ref: 18036




KIDES-DUO Profile
Ref: 18032




KIDES Profile
Ref: 18031




SEPOD Profile
Ref: B6593




SEKOMA Profile
Ref: B6595




SEKODU Profile
Ref: B6597




3035-O Profile
Ref: B8441



LARKO-50 Profile
Ref: C0756




PIKO-ZM Profile
Ref: C1168




PDS-ZMG Profile
Ref: C1418




RAM-KOL-50
Profile
Ref: 18060



RAM-KOL-100
Profile
Ref: 18062



4050 Profile
Ref: 18050



4050-W Profile
Ref: 18051