

PRODUCT DESCRIPTION

- Smooth adjustment of the suspension height at the lighting fixture
- Suspension of the lighting fixture in an inclined position
- Easy installation
- 1.5 m long wire included

Fill empty fields

Product nr.

Fixture type

Company

Job name

Date



TECHNICAL SPECIFICATION

Application

- for suspending the lighting fixture in an inclined position.


Assembly

- ceiling installation using ceiling brackets with fi-5 mounting hole,
- attached to the profile without tools,
- RD-2 mounting with bottom adjustment at the LED lighting fixture using a wire lock and a hook,
- locks remain vertical even with different lengths of wires (with a inclined lighting fixture).


Additional information

- different color versions are available.


TECHNICAL DRAWING

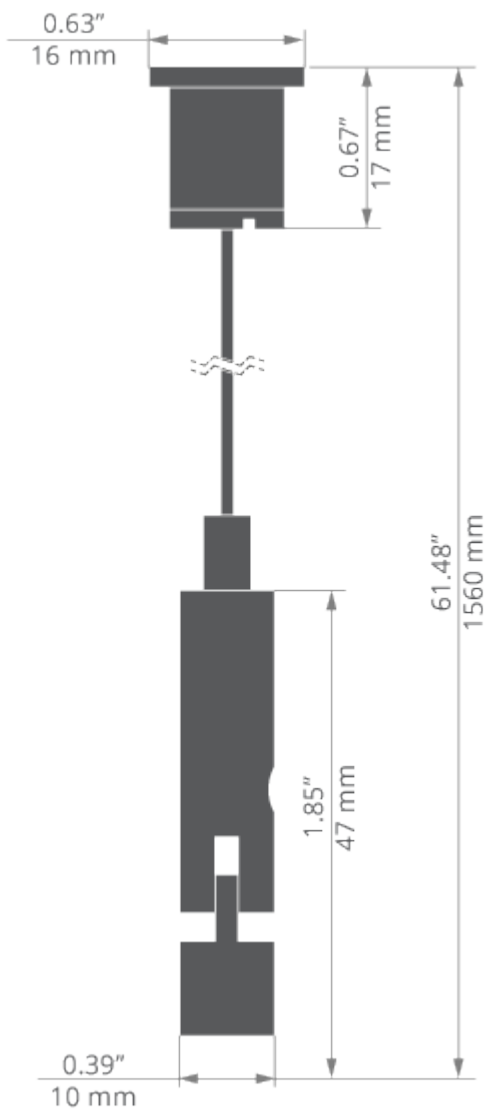


RELATED PROFILES



GIZA-LL profile
Ref: C0758




OPK-4 Profile
Ref: C0370



3035 Profile
Ref: 18039




JAZ Profile
Ref: B8547




OLEK Profile
Ref: B8505




PDS-ZM Profile
Ref: B7696




GIZA Profile
Ref: B5556




LIPOD Profile
Ref: B5554



SEPOD Profile
Ref: B6593




3035-O Profile
Ref: B8441




PIKO-ZM Profile
Ref: C1168




PDS-ZMG Profile
Ref: C1418



PDS-ZM-PLUS
Profile
Ref: C2056




4050 Profile
Ref: 18050



4050-W Profile
Ref: 18051



GIZA-DUO-LL
Profile
Ref: C2162



Profile LIPOD-50
Ref: C2609