

PRODUCT DESCRIPTION

- Infinitely adjustable suspension height at the fixture
- Easy installation without taking the end caps off
- 1.5 m long wire included

Fill empty fields

Product nr.

Fixture type

Company

lob name

Date



TECHNICAL SPECIFICATION

Application

- for suspending linear LED lighting fixtures.

Assembly


- ceiling installation using ceiling brackets with fi-5 mounting hole,
- attached to the profile without tools,
- RD-1 mounting with bottom adjustment at the LED lighting fixture using a wire lock and a hook.

Additional information

- different color versions are available.

TECHNICAL DRAWING



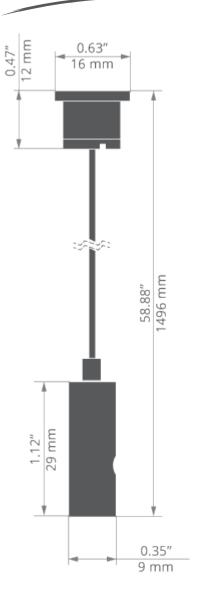




RELATED PROFILES



GIZA-LL profile Ref: C0758



OPK-4 Profile Ref: C0370



3035 Profile Ref: 18039



JAZ Profile Ref: B8547



OLEK Profile Ref: B8505



PDS-ZM Profile Ref: B7696



GIZA Profile Ref: B5556



LIPOD Profile Ref: B5554



SEPOD Profile Ref: B6593



3035-O Profile Ref: B8441



PIKO-ZM Profile Ref: C1168



PDS-ZMG Profile Ref: C1418



PDS-ZM-PLUS Profile Ref: C2056



4050 Profile Ref: 18050



4050-W Profile Ref: 18051



GIZA-DUO-LL Profile Ref: C2162



Profile LIPOD-50 Ref: C2609