

PRODUCT DESCRIPTION

- Designed to reach an IP67 waterproof rating
- Simple design
- Internal corners with appealing finish

Silver anodized

*Custom colors available upon request



Product nr.

Fixture type

Company

Job name

Date

TECHNICAL SPECIFICATION

Application

- for construction of lighting in showcases, shop windows and displays

Fill empty fields

- in grooves and internal 90° corners

Assembly

- with mounting adhesive or appropriately selected screws

Additional information


- possibility of making a linear fixture with IP67 protection, which means the fixture is dustproof and waterproof
- space for LED strip: 13.1 mm

AVAILABLE LENGTHS

Ref. nr.	surface finish	available lengths
B4370ANODA_1	Silver anodized	1000 mm
B4370ANODA_2	Silver anodized	2000 mm
B4370ANODA_3	Silver anodized	3000 mm



TECHNICAL DRAWING





RELATED PRODUCTS

COVERS



HS-12 clear Cover Ref: 00158 110°



HS-12 frosted Cover Ref: 00157 110°



KA-12 clear Cover Ref: 17079



KA-12 frosted Cover Ref: 17078







KA-PRO-12 clear Cover Ref: 17067 110°



KA-PRO-12 frosted Cover Ref: 17066 **100**°





END CAPS



PAC-ALU grey End cap Ref: 00084

ACCESSORIES




6x1,2 Gland Ref: 00802



ZM-120-G Connector Ref: 42308



LED TAPES

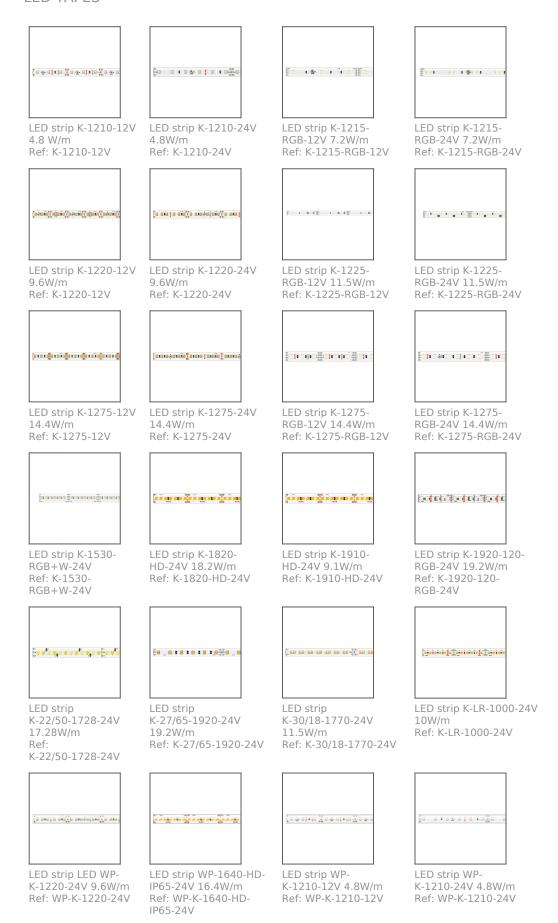





LED strip WP-K-1220-IP65-12V 9.6W/m Ref: WP-K-1220-IP65-12V



LED strip WP-K-1220-IP65-24V 9.6 W/m Ref: WP-K-1220-IP65-24V



LED strip WP-K-1275-24V 14.4W/m Ref: WP-K-1275-24V



LED strip WP-K-1920-120-RGB-24V 19.2W/m Ref: WP-K-1920-120-RGB-24V



LED strip WP-K-27/65-1920-24V 19.2W/m Ref: WP-K-27/65-1920-24V



Taśma LED WP-K-1220-12V 9.6W/m Ref: WP-K-1220-12V



Taśma LED WP-K-1910-HD-IP65-24V 9.1W/m Ref: WP-K-1910-HD-IP65-24V

MARKETING MATERIALS



Presentation set 1 Ref: 90051