

### PRODUCT DESCRIPTION

- Designed to reach an IP67 waterproof rating
- Minimum dimensions to obtain a line of light
- Equipped with a small lock that allows the use of system fasteners and extrusion connectors

FINISH :

Silver anodized

\*Custom colors available upon request



Fill empty fields

Product nr.	
Fixture type	
Company	
Job name	
Date	

## TECHNICAL SPECIFICATION

#### **Application**

- for use in interior architecture in numerous configurations
- small lock facilitates building long linear, suspended, and polygonal lighting fixtures
- the sealed version can be used in external applications

#### Assembly

- mounted to the surface with appropriate mounting adhesives, mounting springs or screws
- can be suspended using UCHO-ZM eye hangers, PUSZ system

#### **Additional information**

- possibility of making a linear fixture with IP67 protection, which means the fixture is dustproof and waterproof
- the profile is suitable for bending into gentle arches, in the plane adjacent to the LED strip

- can be equipped with transparent and frosted covers, as well as aluminum-colored or metallized plastic end caps

- spece for LED strip: 14 mm

#### Profile bending with covers: HS, LIGER, KA, K-BIS.

Minimum internal radius	Minimum external radius	
400 mm	400 mm	

- minimum radius - bending radius which when exceeded causes destruction (deformation, bending or lack of compatibility with other accessories, e.g. covers, end caps, etc.) of the profile

- internal radius - refers to the profile bent so that the cover is facing the inside of the arch



- external radius - refers to the profile bent so that the cover is facing the outside of the arch


- irregular curves are possible after consultation and individual quotation

- when bending anodized profiles, one should be aware of cracking of the anode coating (which may be more or less visible depending on the radius)

### AVAILABLE LENGTHS

Ref. nr.	nr. surface finish	
B7696ANODA_1	Silver anodized	1000 mm
B7696ANODA_2	Silver anodized	2000 mm
B7696ANODA_3	Silver anodized	3000 mm


### **TECHNICAL DRAWING**





# **RELATED PRODUCTS**

### COVERS

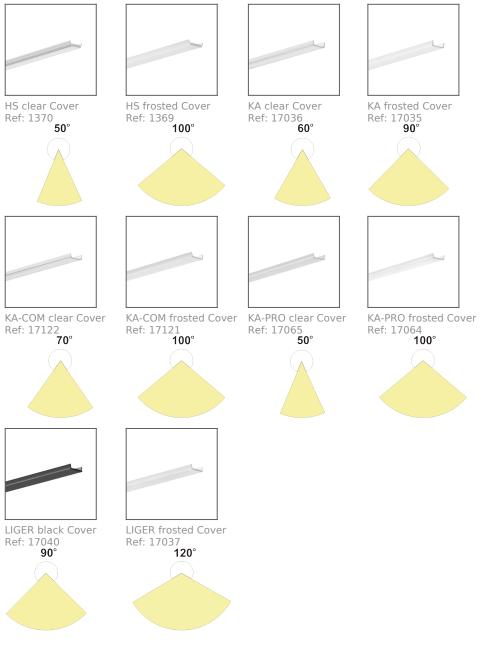

#### END CAPS



cap Ref: 24145





# **ACCESSORIES**



BZP Head Ref: 42213



DP-ZZ Fastener Ref: 00651



Gland 6,4x3 Ref: 42264



PUSZ-LIN-ZM Fastener Ref: 42256



PUSZ-PRET-ZM Fastener Ref: 42276



RG-1 Fastener set black Ref: 42648



BZP-ZO Head Ref: 42214



FI-10-ZM-P Fastener Ref: 42244



M11 Fastener set Ref: 42609



PUSZ-LIN-ZM Fastener Ref: 42275



PUSZ-PRET-ZM black Fastener Ref: 42276L9005



RG-1 Fastener set silver Ref: 42647



BZP-ZZ Head Ref: 42215



FI-10-ZM-W Fastener Ref: 42242



M12 Fastener set Ref: 42610



PUSZ-LIN-ZM black Fastener Ref: 42275L9005



RD-1 Fastener set black Ref: 42650



UCHO-ZM Hanger Ref: 42512




00







**GP** Spring Ref: 00293



Ref: 42611







RD-1 Fastener set silver Ref: 42649







W1 Fastener set Ref: 42602



W2 Fastener set

Ref: 42603

ZM-120


Connector

Ref: 42728

ZM Block Ref: 42520



ZM-135-G Connector Ref: 42310



ZM-500 Fastener Ref: 42119



ZM-PION-120 Connector Ref: 42320



Connector Ref: 42719



ZM-150 Fastener Ref: 42118



ZM-60-G Connector



ZM-PION-135



Ref: 42716

ZM-90 Connector

ZM-PION-45 Connector Ref: 42314



Connector Ref: 42718

## LED TAPES



LED strip K-1210-12V 4.8 W/m Ref: K-1210-12V



LED strip K-1210-24V 4.8W/m Ref: K-1210-24V



LED strip K-1215-RGB-12V 7.2W/m Ref: K-1215-RGB-12V

<u>≣an in t⊗an in</u>				
	00 10 0 00 10 0	P 1 -5	<u>2-⊪</u> a	Hel

LED strip K-1215-RGB-24V 7.2W/m Ref: K-1215-RGB-24V



W6 Fastener set

Ref: 42604

ZM-120-G

Connector

Ref: 42308

ZM-180

Connector

Ref: 42717

ZM-135 Connector Ref: 42720



ZM-45-G Connector Ref: 42338




ZM-90-G Connector Ref: 42306



ZM-PION-90



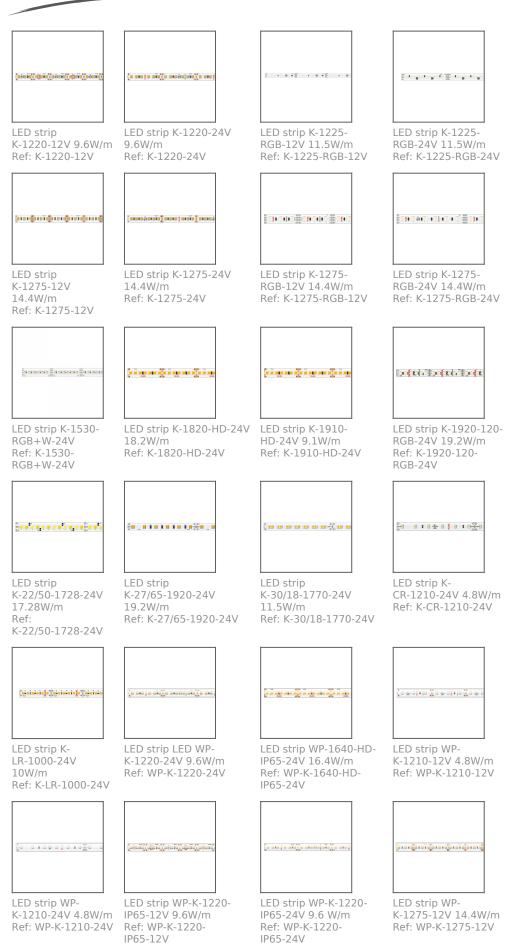





#### MARKETING MATERIALS



Presentation set 6 Ref: 90125