

## PRODUCT DESCRIPTION

The information contained in the description applies to the **PK-4 system** (a set of TPK-4 and OPK-4 profiles, and the PK-4 mounting bracket)

- Designed to reach an IP67 waterproof rating
- Easy LED service (assembly and disassembly OPK-4 extrusion „on click”)
- Line of light in the built-in lighting fixture without visible aluminum elements
- Can build fixtures going seamlessly from recessed to suspended
- Lighting fixtures can be combined to form lighting strings (ZM connectors)
- The standard TPK-4 profile comes with a “foam technical cover” that facilitates “clean” mounting of the fixture in the drywall



### FINISH :

Silver anodized ☐

\*Custom colors available upon request

Fill empty fields

Product nr.

Fixture type

Company

Job name

Date

## TECHNICAL SPECIFICATION

### Application

- for creating serviceable straight- and broken-line fixtures, built into drywall, flush with their surface, without visible aluminum flanges

### Assembly

- the technical strip is mounted with elastic adhesives, used in drywall techniques, and the OPK-4 lighting fixture is snapped in with a mounting bracket
- it is recommended that you use:

Running meter	1 m	2 m	3 m
Mounting brackets	2	3	4

With lighting fixtures shorter than 1 m, use at least 2 mounting brackets.

### Additional information

- possibility of making a linear fixture with IP67 protection, which means the fixture is dustproof and waterproof

- it replaces the old TE-4 system
- OPK-4 system includes a mounting bracket and the TPK-4 protective insert, which protects essential elements against soiling during assembly
- the ability to build polygonal fittings using ZM connectors
- space for LED strip: 12.8 mm

### Profile bending


Minimum internal radius	Minimum external radius
300 mm	300 mm

- minimum radius- bending radius which when exceeded causes destruction (deformation, bending or lack of compatibility with other accessories, e.g. covers, end caps, etc.) of the profile
- internal radius- refers to the profile bent so that the cover is facing the inside of the arch
- external radius - refers to the profile bent so that the cover is facing the outside of the arch
- irregular curves are possible after consultation and individual quotation
- when bending anodized profiles, one should be aware of cracking of the anode coating (which may be more or less visible depending on the radius)


### AVAILABLE LENGTHS

Ref. nr.	surface finish	available lengths
C0370ANODA_1	Silver anodized	1000 mm
C0370ANODA_2	Silver anodized	2000 mm
C0370ANODA_3	Silver anodized	3000 mm

### TECHNICAL DRAWING

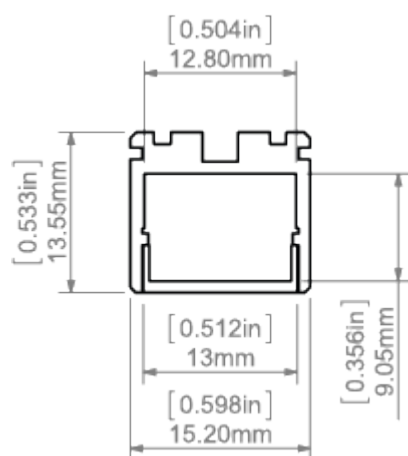


## RELATED PROFILES



TPK-4 Profile  
Ref: 18044

## RELATED PRODUCTS

### COVERS




HS clear Cover  
Ref: 1370

50°




HS frosted Cover  
Ref: 1369

100°





KA clear Cover  
Ref: 17036

60°




KA frosted Cover  
Ref: 17035

90°




KA-COM clear Cover  
Ref: 17122

70°





KA-COM frosted Cover  
Ref: 17121

100°




KA-PRO clear Cover  
Ref: 17065

50°



KA-PRO frosted Cover  
Ref: 17064

100°



LIGER black Cover  
Ref: 17040

90°



LIGER frosted Cover  
Ref: 17037

120°



### END CAPS



OPK-4 grey End  
cap  
Ref: 24238

## ACCESSORIES



6x1,2 Gland  
Ref: 00802



BZP Head  
Ref: 42213



BZP-ZO Head  
Ref: 42214




BZP-ZZ Head  
Ref: 42215



FI-10-ZM-P  
Fastener  
Ref: 42244



FI-10-ZM-W  
Fastener  
Ref: 42242




GP Spring  
Ref: 00293



M11 Fastener set  
Ref: 42609



M12 Fastener set  
Ref: 42610



M13 Fastener set  
Ref: 42611



PUSZ-LIN-ZM  
Fastener  
Ref: 42256



PUSZ-LIN-ZM  
Fastener  
Ref: 42275



PUSZ-LIN-ZM  
black Fastener  
Ref: 42275L9005



PUSZ-PRET-ZM  
Fastener  
Ref: 42250



PUSZ-PRET-ZM  
Fastener  
Ref: 42276



PUSZ-PRET-ZM  
black Fastener  
Ref: 42276L9005



RD-1 Fastener set  
black  
Ref: 42650




RD-1 Fastener set  
silver  
Ref: 42649




RG-1 Fastener set  
black  
Ref: 42648



RG-1 Fastener set  
silver  
Ref: 42647



UCHO-ZM Hanger  
Ref: 42512



UCHO-ZM black  
Hanger  
Ref: 42525



W1 Fastener set  
Ref: 42602




W2 Fastener set  
Ref: 42603




W6 Fastener set  
Ref: 42604




W7 Fastener set  
Ref: 42605




ZM Block  
Ref: 42520




ZM-120  
Connector  
Ref: 42728




ZM-120-G  
Connector  
Ref: 42308




ZM-135  
Connector  
Ref: 42720




ZM-135-G  
Connector  
Ref: 42310




ZM-150 Fastener  
Ref: 42118




ZM-180  
Connector  
Ref: 42717




ZM-45-G  
Connector  
Ref: 42338




ZM-500 Fastener  
Ref: 42119




ZM-60-G  
Connector  
Ref: 42304




ZM-90 Connector  
Ref: 42716



ZM-90-G  
Connector  
Ref: 42306




ZM-PION-120  
Connector  
Ref: 42320




ZM-PION-135  
Connector  
Ref: 42719




ZM-PION-45  
Connector  
Ref: 42314




ZM-PION-90  
Connector  
Ref: 42718




ZM-T45-G  
Connector  
Ref: 42324




ZM-T60-G  
Connector  
Ref: 42326




ZM-T90-G  
Connector  
Ref: 42328




ZM-X45-G  
Connector  
Ref: 42330



ZM-X60-G  
Connector  
Ref: 42332



ZM-X90-G  
Connector  
Ref: 42334



ZM-Y120-G  
Connector  
Ref: 42336

## MARKETING MATERIALS



Foam 70267  
Ref: 70267



PK-4 two-display  
installation  
Ref: 90148



Presentation set 6  
Ref: 90125