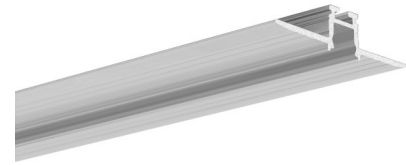## PRODUCT DESCRIPTION

- Very small size (fits in a slot 8 mm deep by 12 mm wide)
- Possibility to use the TECH-10 protective insert to protect the interior of the extrusion from contamination during construction work
- Clean installation of a LED strip
- Lighting fixtures can be combined into long runs using ZM connectors

FINISH :

Non anodized (raw)

*Custom colors available upon request

Fill empty fields

Product nr.

Fixture type

Company

Job name

Date

TECHNICAL SPECIFICATION

Application

- for constructing straight or sectioned LED lighting fixtures which are flush with the ceiling or wall
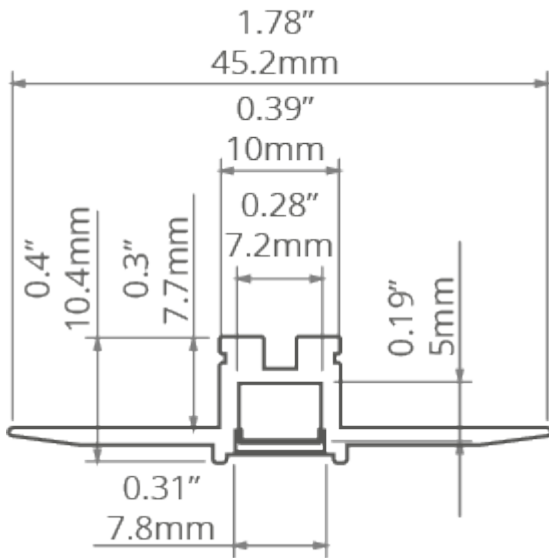- for obtaining built-in "thin" lines of light

Assembly

- the profile is mounted with a special drywall adhesive (CEKOL GS-20 gypsum adhesive or other with similar parameters)

Additional information

- possibility to build fixtures going seamlessly from recessed to suspended (KOZEL-10 extrusions can be combined with PIKO-ZM profiles using ZM connectors for creating lighting runs that stretch into the open area of the room)
- the profile can be used with the 5-KLIK LED strip (5KLIK - an LED strip sealed in a special silicone sleeve)
- ideal for applications in bathrooms and other rooms with high humidity
- spece for LED strip: 7.2 mm

AVAILABLE LENGTHS

| Ref. nr.	surface finish	available lengths
C1575NA_1	Non anodized (raw)	1000 mm
C1575NA_2	Non anodized (raw)	2000 mm
C1575NA_3	Non anodized (raw)	3000 mm

TECHNICAL DRAWING

KLUŚ Inspiring Solutions ®

RELATED PRODUCTS

COVERS

PIKO frosted
Cover
Ref: 17034

END CAPS

PIKO-ZM grey End
cap
Ref: 24307

ACCESSORIES

TECH-10
protective insert
Ref: 17126

ZM-NA-135
Connector
Ref: 42725

ZM-NA-180
Connector
Ref: 42724

ZM-NA-45
Connector
Ref: 42339

ZM-NA-90
Connector
Ref: 42723

ZM-NA-PION-120
Connector
Ref: 42321

ZM-NA-PION-135
Connector
Ref: 42727

ZM-NA-PION-45
Connector
Ref: 42315

ZM-NA-PION-60
Connector
Ref: 42317

ZM-NA-PION-90
Connector
Ref: 42726

MARKETING MATERIALS

Display
P230-90175M
Ref: 90175M

Foam 70424
Ref: 70424