


## PRODUCT DESCRIPTION

- Smooth profile walls
- Bendable without breaking the line of light
- Beautiful proportions
- Minimalist form

### FINISH :

Silver anodized Black anodized 

\*Custom colors available upon request

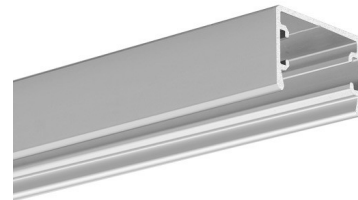

Fill empty fields

Product nr.

Fixture type

Company

Job name

Date

## TECHNICAL SPECIFICATION

### Application

- decorative lighting

### Assembly

- suspended using dedicated accessories
- to the surface with bolts

### Additional information

- line of light obtainable with the LIGER-22 cover and a LED tape with at least 120 LEDs per meter
- GLAZA-LL profile is intended for two or one 10 mm wide LED tape
- two tapes provide uniform illumination of the cover over its entire width
- LED tape gluing width in the profile is 21 mm
- cover and profile are equally long
- broken line of light possible with the MP-22 masking cover
- can be combined into strings using ZM connectors
- small locks inside the profile
- linear fixture with IP67 protection possible
- IP67 possible with LIGER-22, MUN-22 and HS-22 covers

### Profile bending


Minimum radius for a bent fixture shining inwards	Minimum radius for a bent fixture shining outwards
400 mm	300 mm

- minimum radius - bending radius which when exceeded causes destruction (deformation, bending or lack of compatibility with other accessories, e.g. covers, end caps, etc.) of the profile,
- internal radius - refers to the extrusion bent so that the cover is facing the inside of the arch,
- external radius - refers to the extrusion bent so that the cover is facing the outside of the arch,
- irregular curves are possible after consultation and individual quotation,
- when bending anodized extrusions, one should be aware of cracking of the anode coating (which may be more or less visible depending on the radius).

### AVAILABLE LENGTHS

Ref. nr.	surface finish	available lengths
C2627ANODA_1	Silver anodized	1000 mm
C2627ANODA_2	Silver anodized	2000 mm
C2627ANODA_3	Silver anodized	3000 mm
C2627K7_1	Black anodized	1000 mm
C2627K7_2	Black anodized	2000 mm
C2627K7_3	Black anodized	3000 mm


### TECHNICAL DRAWING



## RELATED PRODUCTS


### COVERS

#### BLACK COVERS



LIGER-22 black  
Cover  
Ref: 17087

#### CLEAR COVERS




HS-22 clear Cover  
Ref: 17022

#### FROSTED COVERS



LIGER-22 frosted  
Cover  
Ref: 17032V1



SILER frosted  
Cover  
Ref: 17039

#### SEMI-TRANSPARENT COVERS



MUN-22 semi-  
transparent Cover  
Ref: 17042

### END CAPS


#### REGULAR END CAPS



GLAZA-LL  
metalized End  
cap  
Ref: 24377



GLAZA-LL grey  
end cap  
Ref: 24368



GLAZA-LL black  
End cap  
Ref: 24385

## ACCESSORIES

### FASTENERS & MOUNTING ACCESSORIES



BZP-ZO Head  
Ref: 42214



BZP-ZZ Head  
Ref: 42215



BZP Head  
Ref: 42213



DP Fastener  
Ref: 00644



DP-ZO Fastener  
Ref: 00649




DP-ZZ Fastener  
Ref: 00651



FI-8-LIN-MR  
Fastener black  
Ref: 42287L9005



FI-8-LIN-MR  
Fastener silver  
Ref: 42287




ZM Block  
Ref: 42520


### COMPONENTS FOR CONNECTING PROFILES




ZM-180  
Connector  
Ref: 42717



ZM-PION-135  
Connector  
Ref: 42719




ZM-135  
Connector  
Ref: 42720




ZM-PION-90  
Connector  
Ref: 42718




ZM-90 Connector  
Ref: 42716




ZM-120  
Connector  
Ref: 42728




ZM-45-G  
Connector  
Ref: 42338




ZM-60-G  
Connector  
Ref: 42304




ZM-90-G  
Connector  
Ref: 42306




ZM-120-G  
Connector  
Ref: 42308



ZM-135-G  
Connector  
Ref: 42310



ZM-PION-45  
Connector  
Ref: 42314



ZM-PION-120  
Connector  
Ref: 42320



ZM-MINI-180  
Connector  
Ref: 44501

## SEALING COMPONENTS




6x1,2 Gland  
Ref: 00802


## ADDITIONAL ITEMS



MP-22 white  
Masking cover  
Ref: 17167L9010



MP-22 Masking  
cover black  
Ref: 17167L9005



MP-22 metallized  
Masking cover  
Ref: 17167